



PREMIER PLASTICS FLOUT® DOSING - FLOW COMPARISONS - GROUP 2

DISCHARGE PROFILE
FLT 175 Flout- Field 80 x 1/8 inch Holes. Total Opening Area 0.982 sq.ins.
3" Transport Pipe
10.5' Vertical Drop , 20' Slope
Avg. Flow Rate per Hole 0.475 US Gal. Squirt Height 53"est.

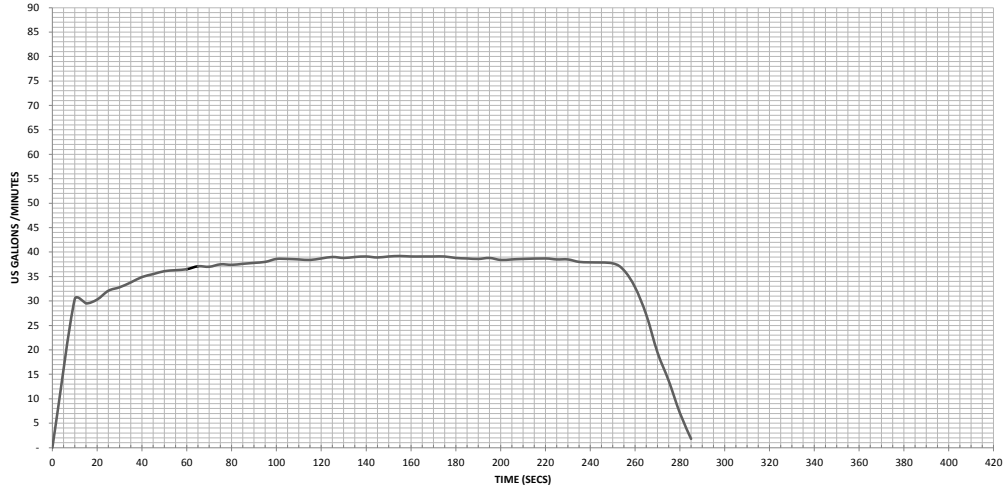

DISCHARGE PROFILE
FLT 175 Flout- Field 80 x 1/8 inch Holes. Total Opening Area 0.982 sq.ins.
3"/2" Transport Pipe (2" -50" Vertical Drop)
10.5' Vertical Drop , 20' Slope
Avg. Flow Rate per Hole 0.50 US Gal. Squirt Height 66"

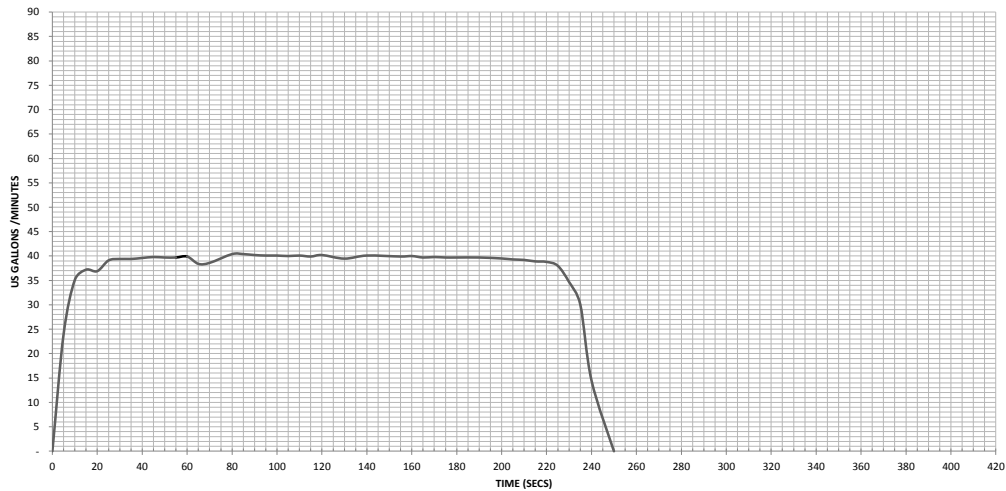

DISCHARGE PROFILE
FLT 175 Flout- Field 80 x 1/8 inch Holes. Total Opening Area 0.982 sq.ins.
4"/2" Transport Pipe (2" -50" Vertical Drop)
10.5' Vertical Drop , 20' Slope
Avg. Flow Rate per Hole 0.45 US Gal. Squirt Height 53"

